

Layout 4 using the EPHR27-VF2 Programmer

With time and temperature controls. Group 3 and 4 boilers operate on demand only.

Gas or oil fired boiler only

Hot water only	A on	B off
Heating and hot water	A on	B on

Solid fuel boiler only.

Heating and hot water	A off	B on
Hot water only or slumber	A off	B off


Solid fuel boiler with gas or oil fired boiler.

Heating and hot water. A on B on

Anti-boil control

In the event of an overheated situation developing, anti-boil stat (2) set at 85°C will make and switch on the space heating pump.

Refer to installation instructions for boiler classification.

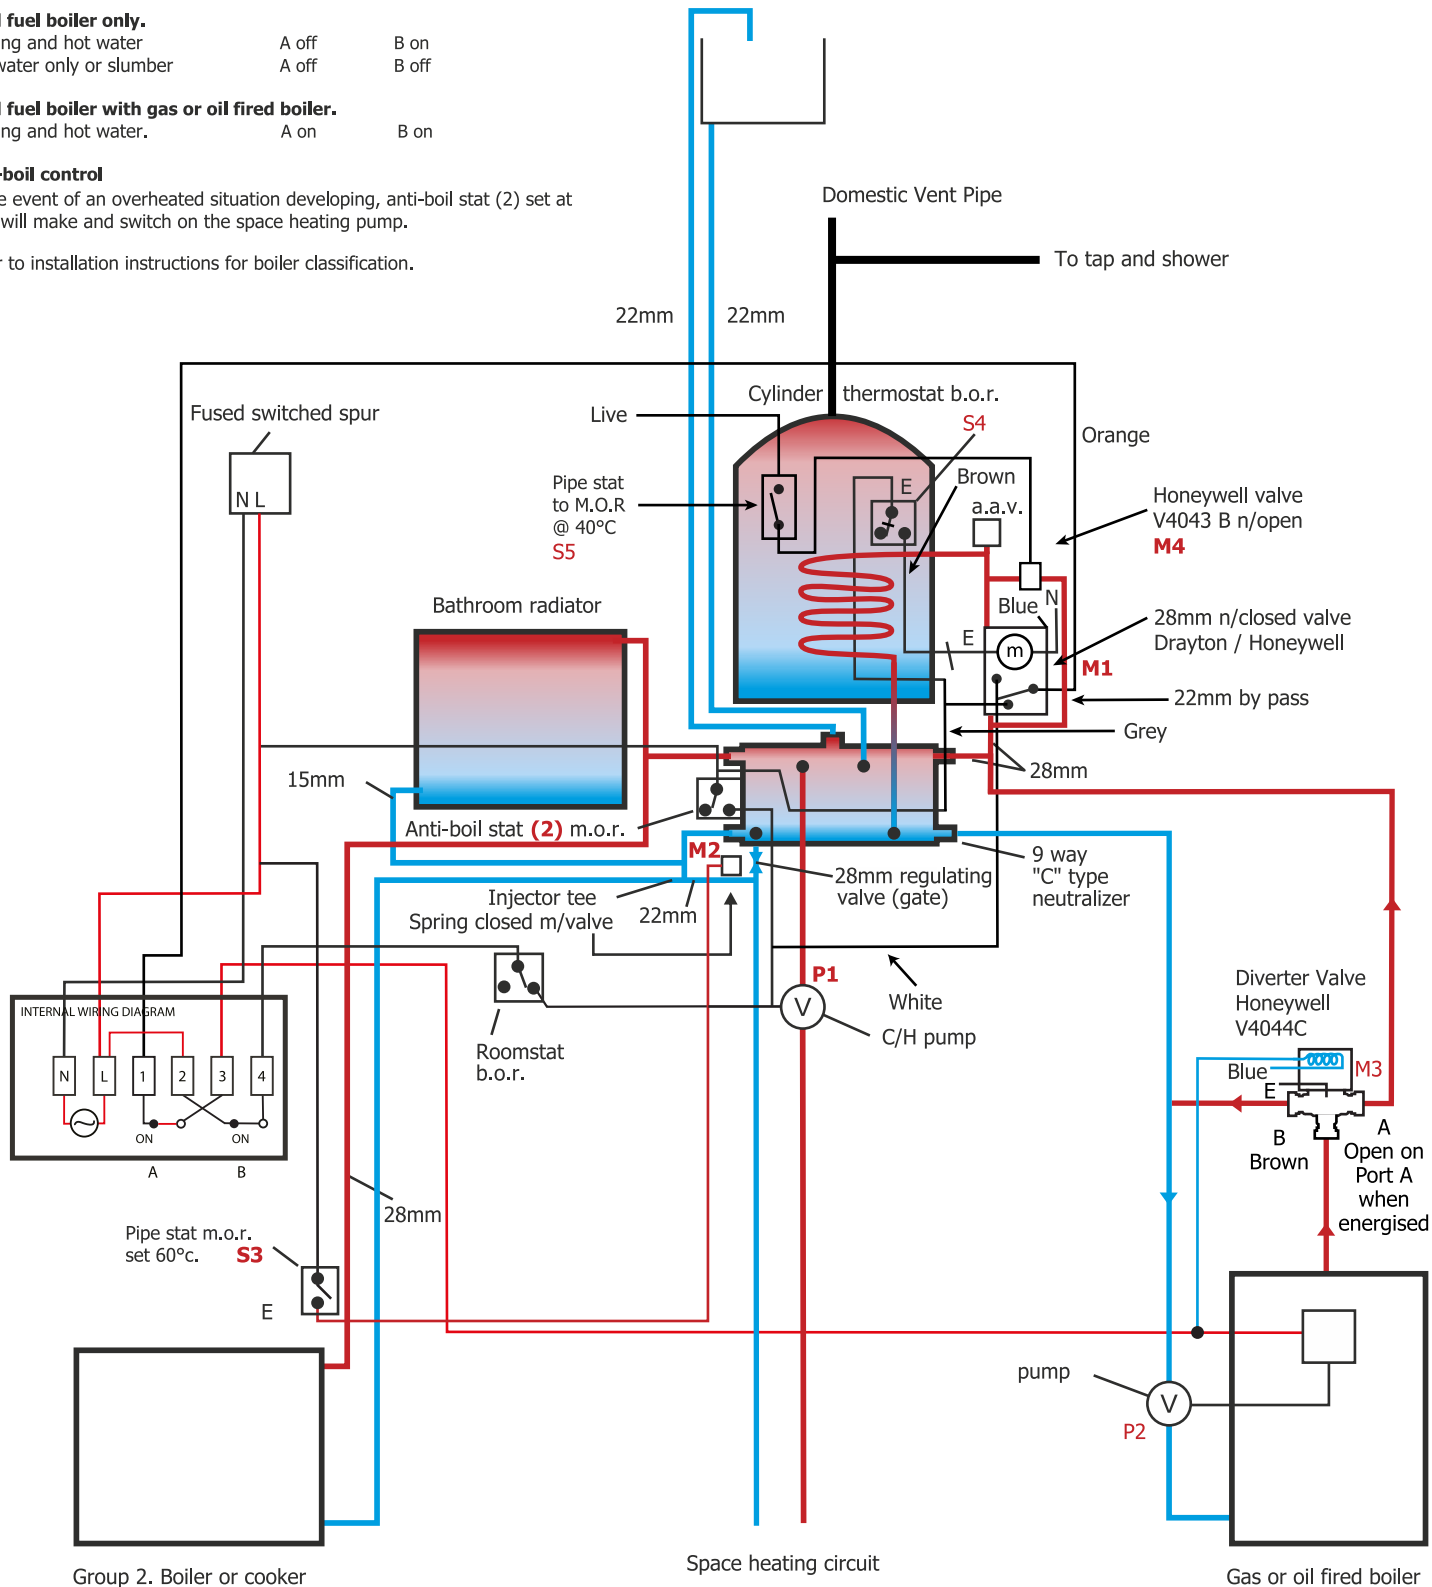

THE BEST OF BOTH WORLDS LINK UP WITH DUNSLEY NEUTRALIZER SYSTEM

DunsleyHeat
WOODBURNING & MULTIFUEL STOVES

Please note these Dunsley Link-up designs are copyrighted for use with the Dunsley Neutralizer system and are not for use with other types of link-up systems as they may not work and we cannot be held responsible for and problems or system failure that may occur.

Dunsley Heat Ltd, Bridge Mills, Huddersfield Road, Holmfirth, Huddersfield HD9 3TW Tel: (01484) 682635
Fax: (01484) 688428 email: sales@dunsleyheat.co.uk Web Site: www.dunsleyheat.co.uk